



Power of Desire



SOMANY

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S. G, Highway, Ahmedabad- 382481, Ph.: 079-27661103 & 04

Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913

www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics



MARVELA / CAT / JUNE 2023

MARVELA
FLORTUFF

SOMANY

Tiles | Bathware

ZAMEEN SE JUDEY


NEW
ARRIVAL

MARVELA
FLOOR TILES
COLLECTION

600x1200mm

PRODUCT LAUNCH

2023

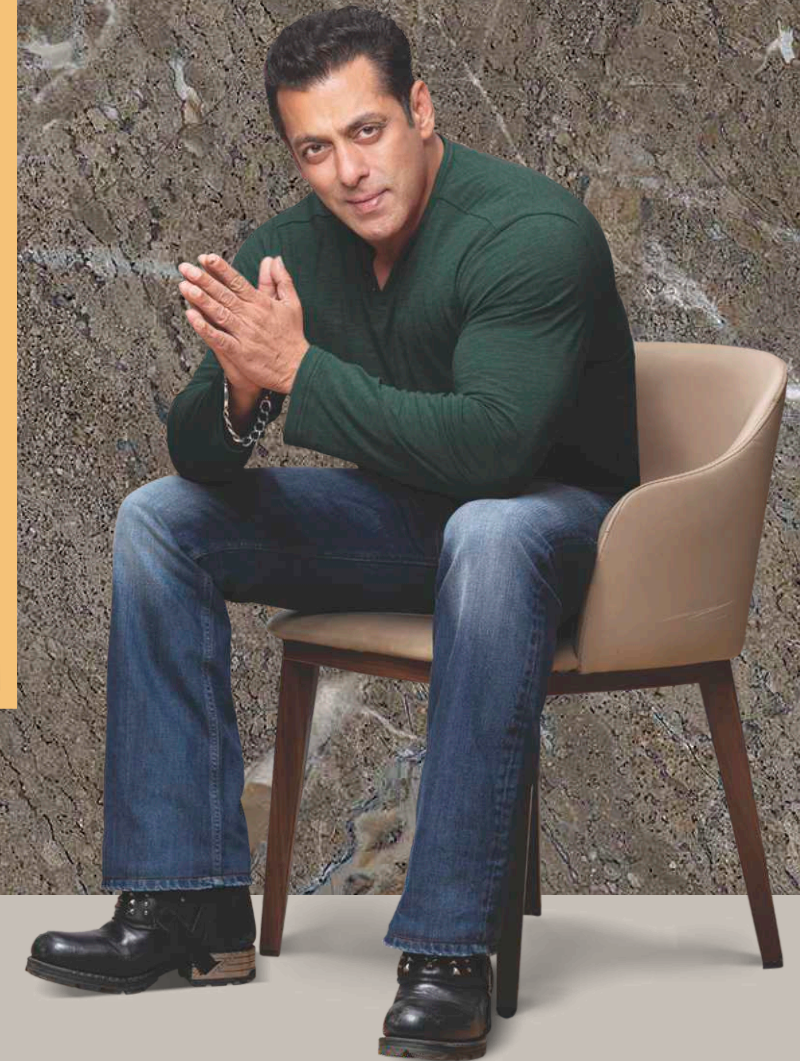

UNIT - 2 | FOR ALL INDIA



Tiles Shown: BON DECIMUS GREY FP

FULL POLISH

TILES COLLECTION

SERIES | SIZE
ENDLESS | **600x1200mm**



BON ALLECTUS NERO FP




BON BLANDUS SNOW FP




BON CAELIUS BROWN FP



BON CAELIUS MINT FP

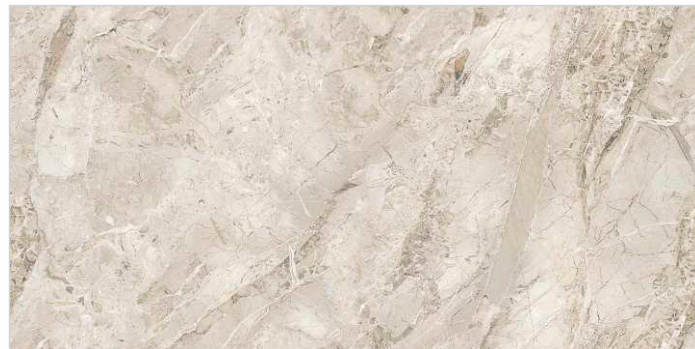

BON BRUTUS BEIGE FP

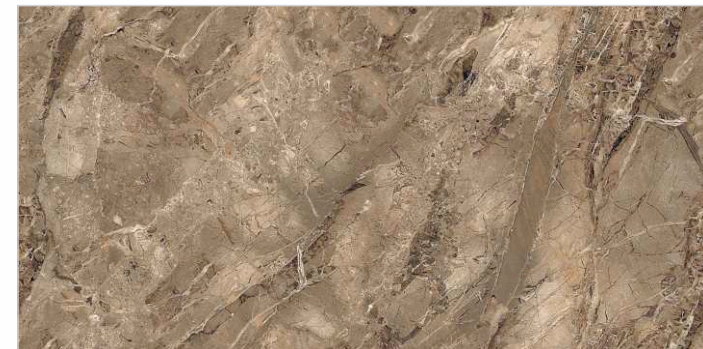

BON BRUTUS BROWN FP




BON CAELIUS OLIVE FP



BON CORNELIUS BEIGE FP



BON BRUTUS NATURAL FP

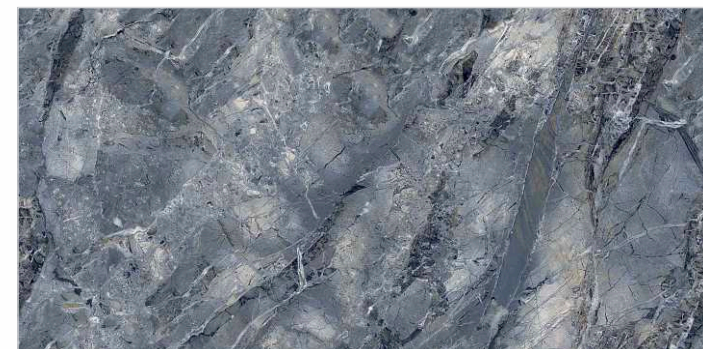

BON BRUTUS PERAL FP



BON CORNELIUS GREY FP



BON CORNELIUS GREY LIGHT FP



FULL POLISH
TILES COLLECTION

SERIES | SIZE
ENDLESS | **600x1200mm**



BON CRISPUS BEIGE FP



BON CRISPUS CREMA FP



BON DECIMUS GREY LIGHT FP




BON VITELLIUS BEIGE FP




BON CRISPUS NATURAL FP



BON DECIMUS BROWN FP

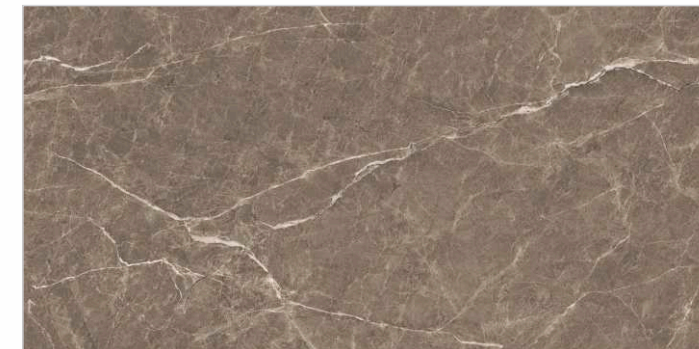


BON VITELLIUS COFFEE FP

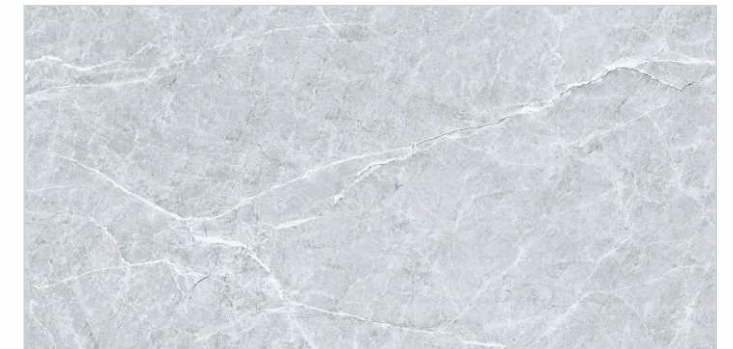

BON VITELLIUS GREY LIGHT FP



BON DECIMUS CREMA FP

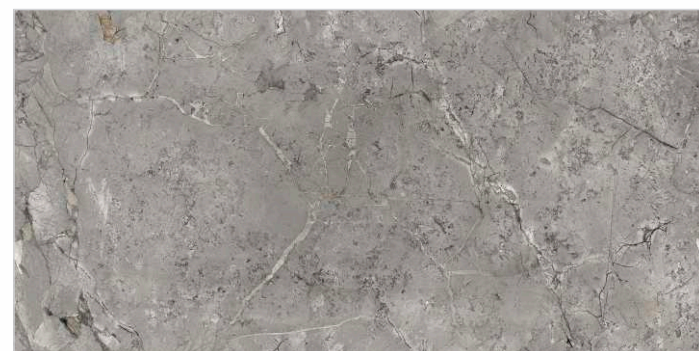

BON DECIMUS GREY FP





Tiles Shown: BON NUMITOR BEIGE FP

FULL POLISH
TILES COLLECTION

SIZE
600x1200mm




BON ADDISON MARFIL FP



BON DOMITIAN GREY LIGHT FP



BON FLAMINIO CREMA FP

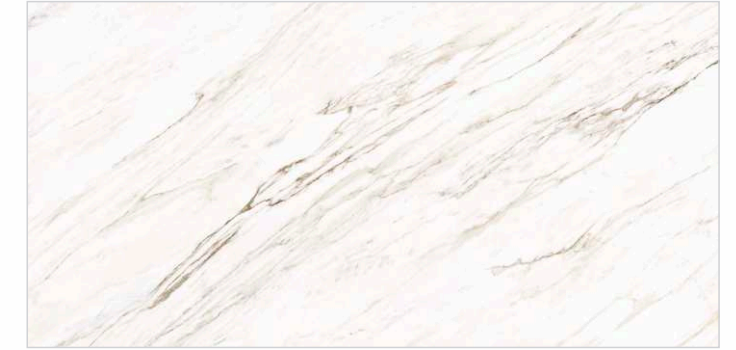

BON ILLUSION DAISY FP



BON DOMITIAN GREY FP




BON DOMITIAN GRIS FP



BON MINTONS ARCTIC FP



BON MONDRIAN WHITE FP

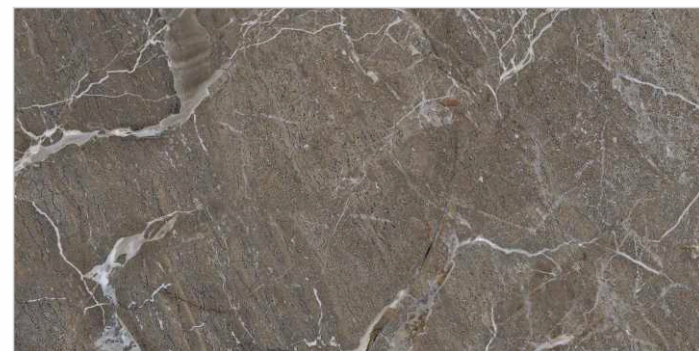


BON DOMITIAN MOKA FP



BON FLAMINIO BLUE FP



BON NUMITOR BEIGE FP

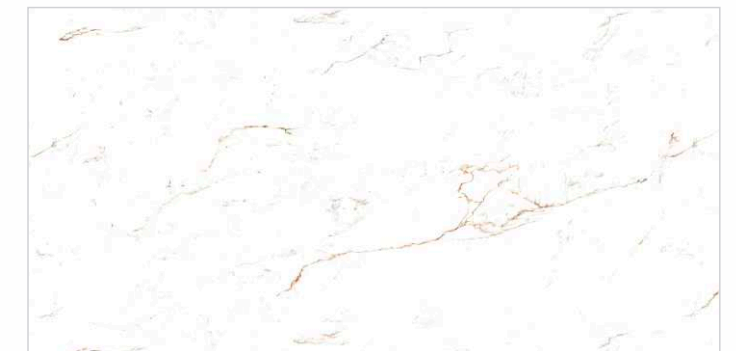

BON ADEOLA WHITE



FULL POLISH
TILES COLLECTION

SIZE
600x1200mm




BON ROGAN BLANCO FP



BON ROGAN VERDE FP




BON VINCENZO NEGRO FP

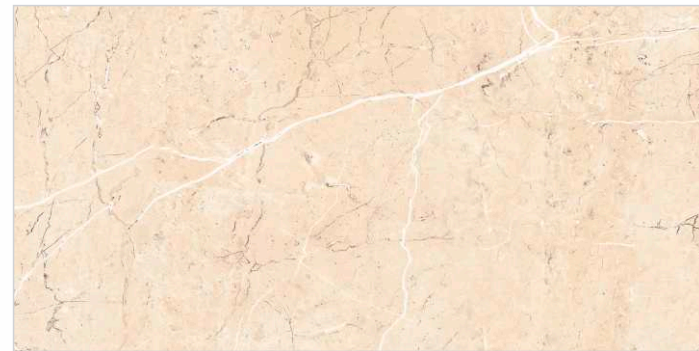


BON ROMULUS BEIGE FP




BON ROMULUS ROZO FP

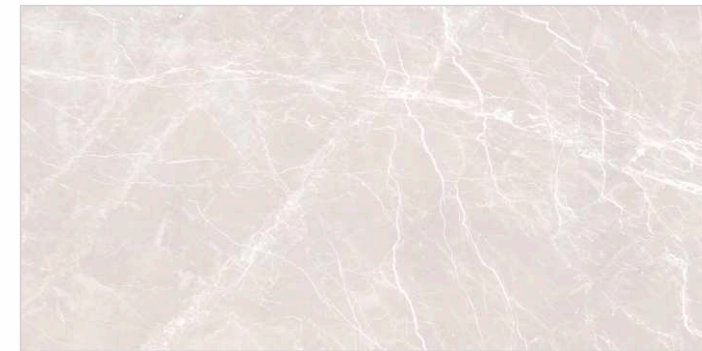

BON VINCENZO ASH FP

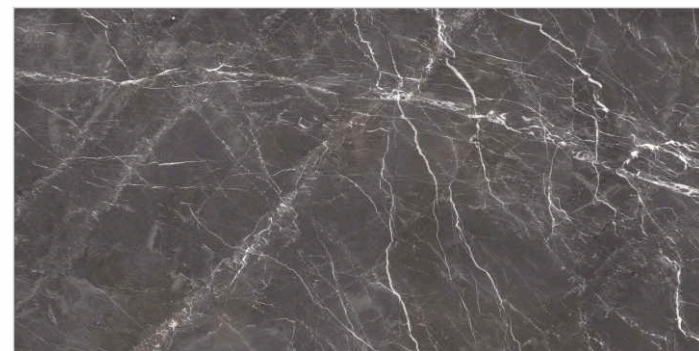

BON VINCENZO GREY FP

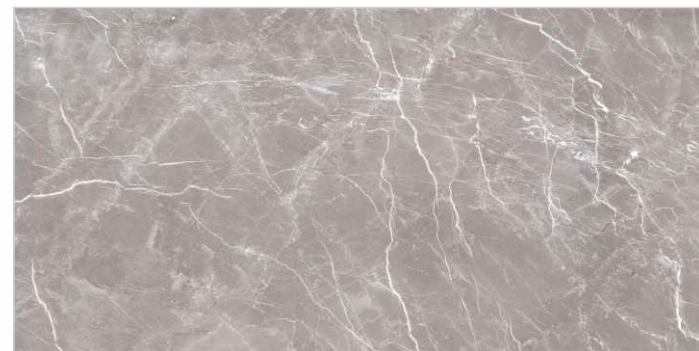


BON VINCENZO GREY LIGHT FP



DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.

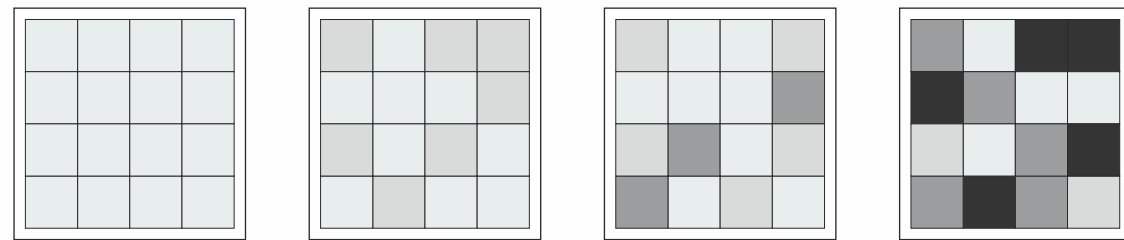

V1 Uniform Appearance **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follow:

V1 Minimal Variation **V3** Random Variation **V2** Slight Variation **V4** Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.

For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder. And use with spacer to look good

Notes

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. "Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixd. Complaints will not be entertained for Borders, Highlighters & Motifs.

PACKING DETAIL FOR UNIT-2 MARVELA TILES

Nominal Size	Thickness (mm)	Av. Wt. per carton (Kg)	No. of Tiles per carton	Coverage area per carton
600X1200 mm	9	28.76	2	1.44 Sq.Mt/15.5 Sq.Ft.

TECHNICAL SPECIFICATION FOR UNIT-2 MARVELA TILES

Characteristics		Requirement as per IS 15622 :2017 Table-08, W.A 0.08 < E < 3 Group B Ib	Requirement as per ISO 13006 Annex-H, 0.5 < E ≤ 3 Group B Ib	Our Value for 600x1200 & 600 X 600 tiles Marvela	Test Method	
A	Dimension & Surface Quality	Rectified			IS 13630	ISO 10545
i	Length & Width	±0.10%	±0.30%	± 0.10%	Part 1	Part 2
ii	Thickness	± 5.0 %	± 5.0%	± 4.0%	Part 1	Part 2
iii	Straightness of Side	± 0.10%	±0.3%	± 0.10%	Part 1	Part 2
iv	Rectengularity	± 0.10%	±0.3%	± 0.10%	Part 1	Part 2
v	Surface Flatness					
a	Center curvature (%) (max.Deviation)	± 0.5 %	±0.4%	± 0.20%	Part 1	Part 2
b	Edge curvature (%) (max.Deviation)	± 0.5 %	±0.4%	± 0.20%	Part 1	Part 2
c	Corner warpage (%) (max.Deviation)	± 0.5 %	±0.4%	± 0.2%	Part 1	Part 2
vi	Surface Quality	Min. 95 % of tiles will be free from visible defects	95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Part 1	Part 2
B	Physical Properties					
i	Water Absorption	Average 0.08 %<E<3.0 % , Individual Maximum 3.30	0.5<E 3.0, Individual max 3.3%	3% max	Part 2	Part 3
ii	Modulus of Rupture [N/mm ²]	Av 30 , Individual 27 min	Av 30 , Individual 27 min	Min 30	Part 6	Part 4
iii	Breaking Strength in N	Min. 1100	Not less than 1100	Min. 1100	Part 6	Part 4
iv	Moisture Expansion in mm/m	0.02 Max	*Test Method Available	0.02 Max	Part 3	Part 10
v	Scratch Hardness of surface (Mohs)	Min 4	N.A	polished 3	Part 13	
vi	Resistance to Deep Abrasion of unglazed tiles	N.A	N.A	N.A	Part 12	Part 6
vii	Resistance to Abrasion of glazed tiles(Class I to V)	Commercial application Min IV, Home Application Min II	Report Abrasion Class & Cycle Passed	Depends on Glaze surface, PEI Glossy polish - III, Matt- IV, V,C-V	Part 11	Part 7
viii	Coefficient of linear thermal expansion from embiant temperature to 100° C	7 X 10 ⁻⁶ K ⁻¹ Max	Test Method Available	7 X10 ⁻⁶ K ⁻¹ max	Part 4	Part 8
ix	Thermal Shock Resistance	10 cycle min	Test Method Available	Passed 10 Cycle	Part 5	Part 9
x	Crazing Resistance	4 cycle @ 7.5bar min	Required	Passed 4 Cycle	Part 9	Part 11
xi	Forst resistance	Required , if agreed	Test Method Available	Resistance	Part 10	Part 12
xii	Bulk Density	N.A	N.A	N.A	Part 2	
xiii	Impact resistance	0.55 Min	Test Method Available	0.55 Min	Part 14	Part 5
C	Chemical Resistance (glazed Tiles)					
i	Stain Resistance	Min Class-1	Min Class-3	Min Class-1 & 2 For Polish	Part 8	Part 14
ii	Resistance to household chemicals	Min Class AA	Min Class B	Min Class AA	Part 8	Part 13
iii	Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Manufacturer to state classification	Min Class AA	Part 8	Part 13

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order. "Technical Specifications for Somany Wall & Floor Tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixd. Complaints will not be entertained for Borders, Highlighters & Motifs.